


# 80 SERIES LANDCRUISER ENGINE SPLASH GUARDS INSTALL & DIAGRAMS




Remove existing splash guards and don't worry about saving the fasteners as you will be replacing with new (enclosed). A common panel fastener/clip removal tool is the best way to remove the fasteners. Using the diagrams below, line up the appropriate piece with the right location and attach using the enclosed fasteners. There are (18) 1/4" fasteners needed to attach the splash guards. Be sure and push the fasteners all the way in.

Our Nitrile Rubber is a family of unsaturated polymers with qualities of superior strength and high resistance to oil, gas and most chemicals. It has a natural black unfinished appearance which makes it ideal for many automotive applications.

**Driver Front**

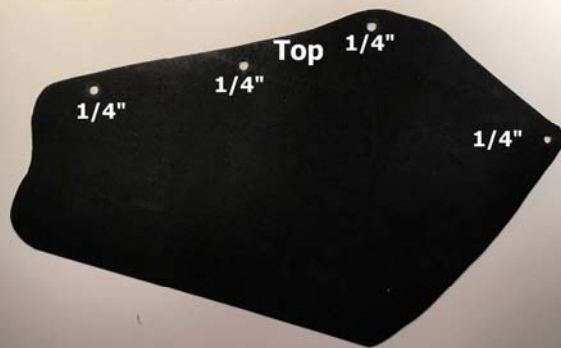

**Driver Rear**

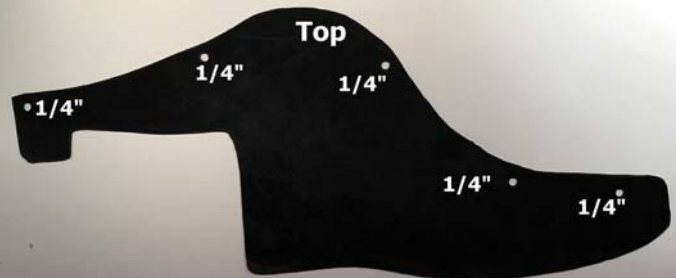

**Passenger Rear**



**Passenger Front**

